



WHY MXG™ 5K?

INDUSTRY LEADING TECHNOLOGY

IMPROVED ERGONOMICS

Material advancements allows MXG 5K to maneuver in tighter spaces with a smaller footprint without sacrificing quality or application performance.

OPTIMIZE OPERATIONS

Fit more MXG 5K in smaller spaces and get more fluid power output.

ENHANCED DURABILITY

Constructed with Gates XtraTuff™ Plus cover for superior ozone, heat, and abrasion protection.

MULTI-SPECIFICATION

Exceeds performance criteria for ISO 18752 350DC, SAE 100R13, EN856 R13, ISO 3862 R13; sizes -10 and -12 also exceeds EN856 4SP performance requirements.



MXG 5K is **qualified to 1,000,000 impulse cycles** at ISO 18752 DC




35% lower force-to-bend and **5% more compact** construction compared to legacy hoses (EFG5K) across all sizes



25% lighter weight on average across all sizes



25x abrasion-resistance than standard covers

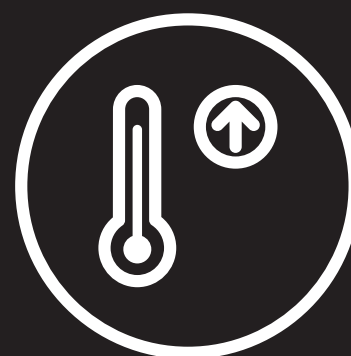

Engineered to withstand operating temperatures **up to 250°F (121°C)**



Available in sizes: -6, -8, -10 and -12



FOR MORE INFORMATION ON THE NEXT-LEVEL PERFORMANCE INNOVATION FOR YOUR OPERATION VISIT US AT [GATES.COM](https://www.gates.com)